EAST PENN TRACTION CLUB
T-TRAK-N FOR TROLLEYS
USING TOMIX TRACK WITH KATO
MINIMUM RADIUS 140mm (5 1/2in)
TRACK SPACING 33mm (1 1/4in) "ALTERNATE"
TTRAK.DWG REV. 11/13/2008 R.D.KERR

T-TRAK FOR TROLLEYS
SINGLE-TRACK TERMINUS
(Car enters and stops;
throw switch/points to depart)



620mm (24 3/8in)
210mm (8 1/4in)

T-TRAK FOR TROLLEYS
STREET CORNER
"Y" JUNCTION
BUILT TO
"ALTERNATE"
CORNER SIZE

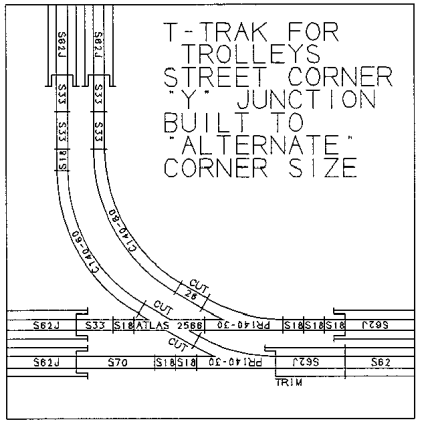

365mm (14 3/8in)
x 365mm (14 3/8in)

T-TRAK FOR TROLLEYS
END LOOP
AT 60 DEGREES

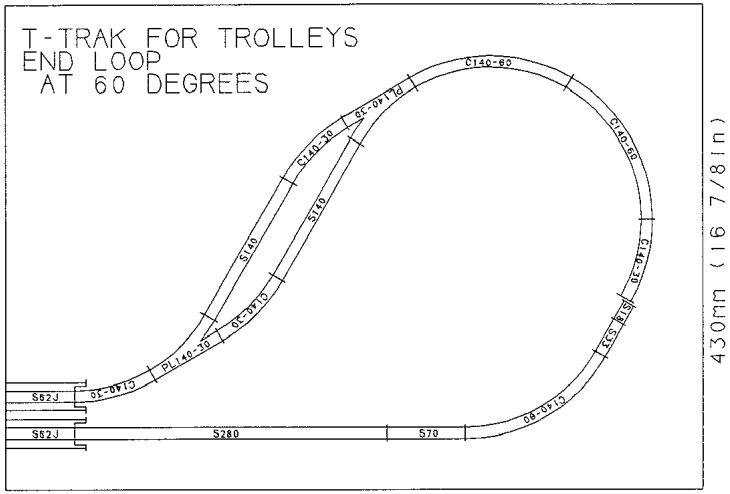

625mm (24 5/8in)

T-TRAK FOR TROLLEYS
MINIMUM DEPTH
"U" TURN

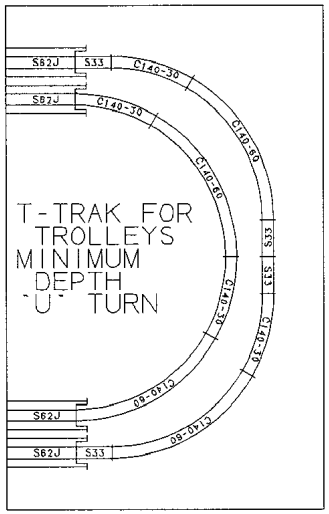

446mm (17 5/8in)
285mm (11 1/4in)

T-TRAK FOR TROLLEYS
STREET CORNER



285mm (11 1/4in)
285mm (11 1/4in)

T-TRAK STRAIGHT
"ALTERNATE" SPACING
"STANDARD" DEPTH

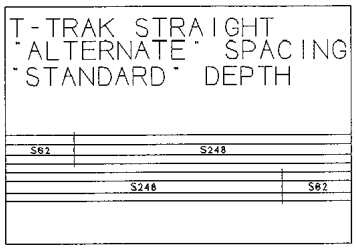

310mm (12 1/8in)
x 210mm (8 1/4in)

T-TRAK CORNER
"ALTERNATE"
SPACING

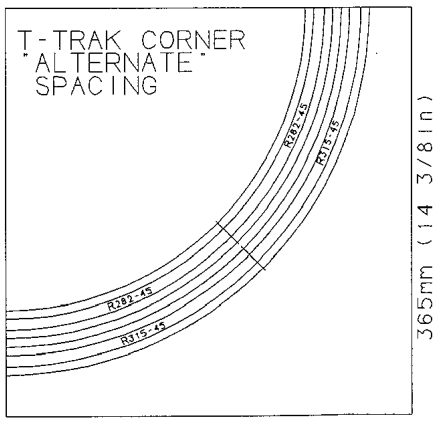

365mm (14 3/8in)
365mm (14 3/8in)

T-TRAK FOR
TROLLEYS
STREET CORNER
BUILT TO
"ALTERNATE"
CORNER SIZE

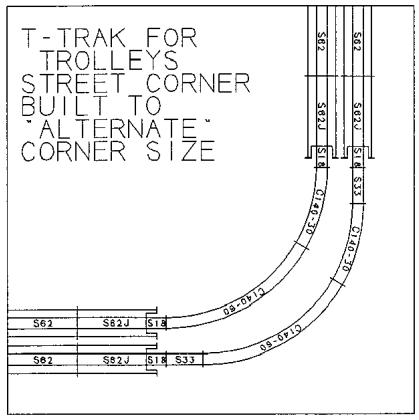

365mm (14 3/8in)
365mm (14 3/8in)

T-TRAK FOR
TROLLEYS
END LOOP
AT 90 DEGREES

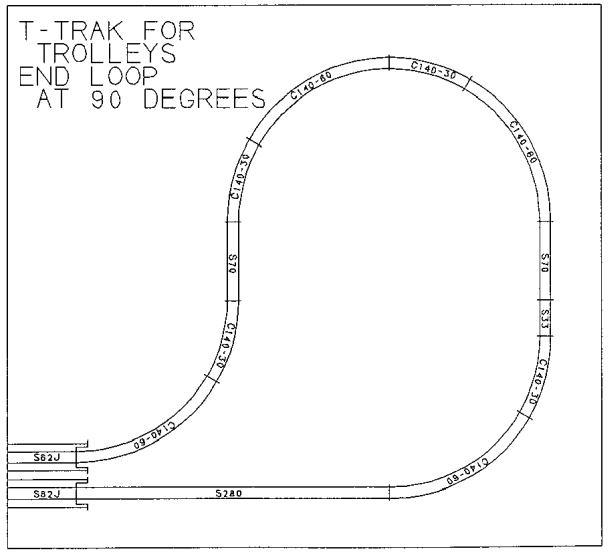

484mm (19in)
532mm (21in)

T-TRAK STRAIGHT
"ALTERNATE" SPACING
"DEEP" DEPTH

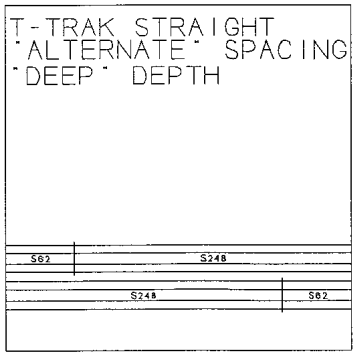

310mm (12 1/8in)
x 310mm (12 1/8in)